

Model: I.T.E Interchangeable wall mount HK-AJ-XXYY Series 24 W

Feature:

- 1.Universal Input
- 2.Available Ratings 0~24W
- 3.Optional AC Plug US, EU, UK, CH or AU
- 4.OVP, OCP, OPP, Auto Recovery
- 5.CEC/ EUP efficiency level compliance up to Level 5
- 6.Size: Size: 70.5L x 45 W x 30H mm
- 7.Low cost
- 8.Safety agency approval by CB-TUV/GS TUV/FCC/CE/UL/LVD/PSE
- 9.Design to meet safety standard EN60950-1 I.T.E
- 10.Rohs compliance



Specifications:


Parameter Description/SPEC.:

Input Voltage:	100 ~ 240 VAC +/-10%
Inrush Current:	35A at 115VAC/ 70A at 230VAC max.
Dielectric Withstand Input/ Output :	3000 VAC
Leakage current:	< 0.25mA
Efficiency:	>= 87% type. for CEC requirement
No Load Stand by power:	<=0.3W @ 230 VAC
Hold Up Time:	10mS at Nominal Line
Output Voltage:	DC 12~24V (Typical Single output)
Ripple & Noise:	2% p-p max Load
Regulation:	± 5% max.
Operating Temperature:	-10 °C ~ +50 °C (derating linearly from 100% load @ 40 °C to 75% load @ 50 °C)
Storage Temperature:	-20 to +85°C
Protections:	OCP, OVP,OPP (Over Power & Short circuit)
Safety standard:	IEC/UL/EN60950-1, CE, CB ,CCC
EMC standard:	EN55022(CISPR 22) class B, FCC class B
Standard output connector:	Options
Standard output cable length:	UL1185, #22~20AWG/ 5Ft.
Optional output connector type:	Min din/ Pennell mount / Water proof / Molex


Available labeling ratings

Model / PLUG/ (Cust. code)	Voltage	Ampere
HK-AJ-12 (xx-yy)	12V	2.0A
HK-AJ-15 (xx-yy)	15V	1.6A
HK-AJ-20 (xx-yy)	20V	1.2A
HK-AJ-24 (xx-yy)	24V	1.0A

Outline Dimension

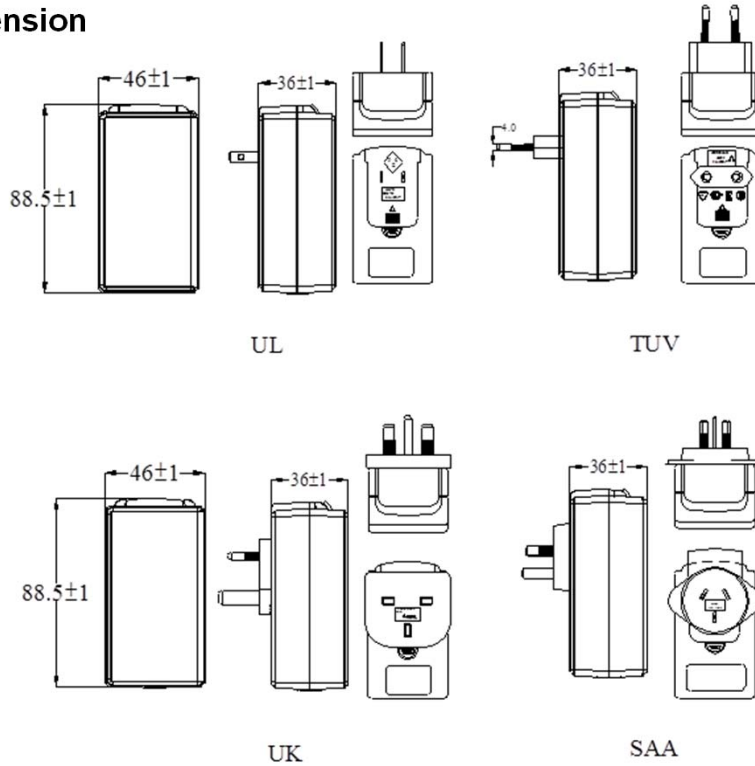

*Temperature derating

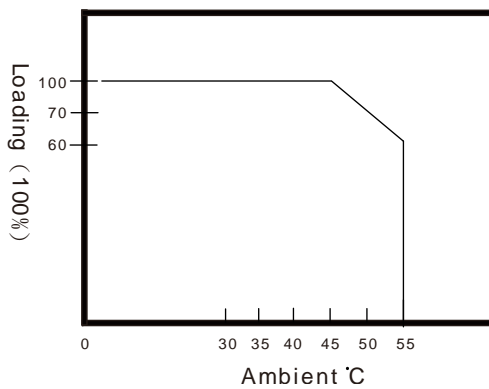

*Static characteristics

